


KTRZ TESTA RIDOTTA CORPO CILINDRICO ZIGRINATO IN ACCIAIO INOX

RH-KB/SS REDUCE HEAD KNURLED BODY STAINLESS STEEL

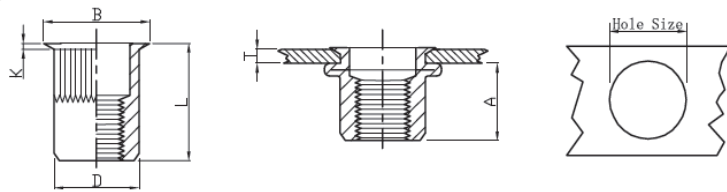


Unit: mm

THREAD	P/N	LD P/N	T (grip range) Min Max	A Ref	Hole size +0.10	D +0.07 -0.1	B +/-0,3	K +/-0,2	L +/-0,3
M3	RH-KB/SS-0315	KTRZM3C2	0.5-1.5	6,8	5,0	5,0	6,0	0,60	8,5
M3	RH-KB/SS-0325	KTRZM3L2	1.5-2.5	6,0	5,0	4,9	5,5	0,35	9,5
M4	RH-KB/SS-0420	KTRZM4C2	0.5-2.0	6,5	6,0	5,9	7,0	0,50	10,5
M4	RH-KB/SS-0440	KTRZM4L2	2.0-4.0	6,5	6,0	5,9	7,0	0,50	13,0
M5	RH-KB/SS-0520	KTRZM5C2	0.5-2.0	7,2	7,0	6,9	8,0	0,50	11,5
M5	RH-KB/SS-0535	KTRZM5L2	2.0-4.0	7,2	7,0	6,9	8,0	0,50	13,0
M6	RH-KB/SS-0625	KTRZM6C2	0.5-2.5	8,7	9,0	8,9	10,0	0,60	14,0
M6	RH-KB/SS-0645	KTRZM6L2	3.0-4.5	8,7	9,0	8,9	10,0	0,60	17,5
M8	RH-KB/SS-0830	KTRZM8C2	0.5-3.0	10,5	11,0	10,9	12,0	0,65	16,5
M8	RH-KB/SS-0850	KTRZM8L2	3.0-5.0	10,5	11,0	10,9	12,0	0,65	18,5
M10	RH-KB/SS-1035	KTRZM10C2/13	1.0-3.5	10,7	13,0	12,9	14,0	0,70	17,7
M10	RH-KB/SS-1035	KTRZM10C2/12	1.0-3.5	10,7	12,0	11,9	13,0	0,70	17,7
M12	RH-KB/SS-1235	KTRZM12C2/16	1.0-3.5	16,0	16,0	15,9	17,6	0,75	24,2

KTRZC TESTA RIDOTTA CORPO CILINDRICO ZIGRINATO CHIUSO IN ACCIAIO INOX

RH-KBC/SS REDUCE HEAD KNURLED BODY CLOSE END STAINLESS STEEL

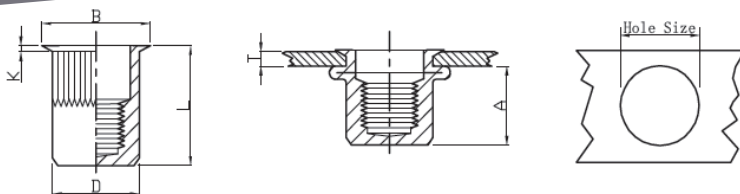

Unit: mm

THREAD	P/N	LD P/N	T (grip range) Min Max	A Ref	Hole size +0.10	D +0.07 -0.1	B +/-0,3	K +/-0,2	L +/-0,3
M3	RH-KBC/SS-0315	KTRZCM3C2	0.5-1.5		5,0	4,9	6,0	0,50	11,0
M3	RH-KBC/SS-0325	KTRZCM3L2	1.5-2.5		5,0	4,9	6,0	0,50	13,0
M4	RH-KBC/SS-0420	KTRZCM4C2	0.5-2.0	11,0	6,0	5,9	7,0	0,50	15,0
M4	RH-KBC/SS-0440	KTRZCM4L2	2.0-4.0	11,0	6,0	5,9	7,0	0,50	16,5
M5	RH-KBC/SS-0525	KTRZCM5C2	0.5-2.5	12,5	7,0	6,9	8,0	0,60	16,5
M5	RH-KBC/SS-0545	KTRZCM5L2	2.5-4.5	12,5	7,0	6,9	8,0	0,60	18,0
M6	RH-KBC/SS-0630	KTRZCM6C2	0.5-3.0	15,5	9,0	8,9	10,0	0,60	20,5
M6	RH-KBC/SS-0645	KTRZCM6L2	3.0-4.5	15,5	9,0	8,9	10,0	0,60	22,0
M8	RH-KBC/SS-0835	KTRZCM8C2	0.5-3.5	17,0	11,0	10,9	12,3	0,60	23,0
M8	RH-KBC/SS-0845	KTRZCM8L2	3.0-4.5	17,0	11,0	10,9	12,3	0,60	24,5
M10	RH-KBC/SS-1035	KTRZCM10C2/13	0.5-3.5	18,2	13,0	12,9	14,5	0,85	24,5
M10	RH-KBC/SS-1050	KTRZCM10L2/15	3.0-5.0	18,2	13,0	12,9	14,5	0,85	26,0
M12	RH-KBC/SS-1240	KTRZCM12C2	2.0-4.0	20,0	15,0	14,9	16,5	0,85	28,0